



NT 75/1 Me Ec H Z22

The TÜV tested safety vacuum cleaner NT 75/1 Me Ec H Z22 is a more robust, single engine wet and dry vacuum cleaner for explosive dust (hazard class zone 22) with continuous anti-static system.



1 Zone 22 + dust class H

- For combustible dusts in dust explosion classes, zone 22 and health-endangering dusts, dust class H.

3 Brushless EC drive

- The brushless EC drive has a life expectancy of 5000 hours - ideal for continuous use.

2 Antistatic system

- All Kärcher safety vacuum cleaners feature a continuous antistatic system with conductive accessories.



NT 75/1 Me Ec H Z22

- Brushless EC drive (5000 h)
- Antistatic system
- Suitable for asbestos

Technical data

Order Number		1.667-239.0
EAN code		4039784538115
Air flow	l/s	61
Vacuum	mbar / kPa	220 / 22
Container capacity	l	75
Max. rated input power	W	1000
Standard nominal size		40
Cable length	m	10
Sound level	dB(A)	76
Weight	kg	27,8
Dimensions (L x W x H)	mm	640 × 540 × 925

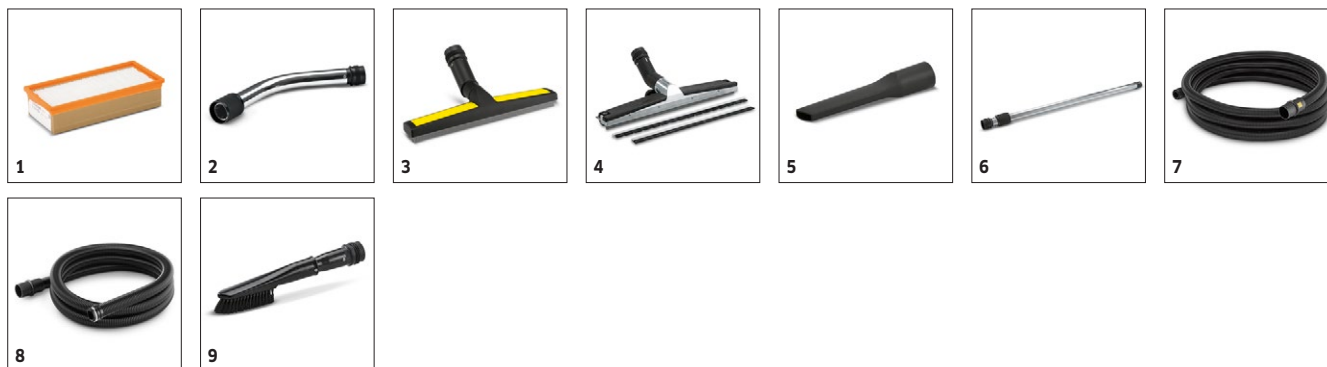
Equipment

Suction hose	m	4	Dust class	H
Suction Tube	piece(s) / m	1 × 1 / Metal		
Filter bag		Fleece		
Wet and dry floor tool	mm	360		
Crevice nozzle		■		
Antistatic system		■		
Stainless steel container		■		
Flat pleated filter		Fibreglass		
Push handle		■		
Safety class		I		
Caster with brake		■		

■ Included in delivery.

NT 75/1 ME EC H Z22

1.667-239.0

KÄRCHER


		Order Number	Quantity	ID	Length	Width	Price	Description	
HEPA filter for dust class H									
HEPA surface filter	1	6.904-364.0	1 piece(s)					HEPA surface filter - dust class H (H 14) - with glass-fibre layers increases filter capacity when vacuuming health-endangering and carcinogenic dust.	■
Bend metal									
Metal bend, ID 40	2	4.036-032.0	1 piece(s)	ID 40				Unmistakeable bend, chromium-plates and crooked, ID 40, with special fixation sleeves use with special safety vacuum cleaner for dust explosion classes B1.	■
All-purpose nozzles (wet/dry)									
Wet and dry floor tool DN 40	3	4.763-244.0	1 piece(s)	ID 40		360 mm		All-purpose plastic nozzle (DN 40) with 360 mm working width. With side rollers, brush strips (6.905-878.0) and squeegees (6.905-877.0). Only for NT-80/1 B1 M + MS.	■
All-purpose nozzle, ID 40	4	4.130-399.0	1 piece(s)	ID 40		450 mm		Aluminium floor nozzle, earthed, non-interchangeable, 370 mm, height-adjustable.	□
Crevice nozzles									
Crevice tool ID 40	5	4.763-243.0	1 piece(s)	ID 40	290 mm			Plastic crevice tool (DN 35) with non-interchangeable screw connection for vacuuming in crevices and corners. Length: 290 mm.	■
Suction tubes metal									
Suction tube, DN 40, 1 m	6	4.025-372.0	1 piece(s)	ID 40	1 m			Non-interchangeable suction tube ID 40, 1.0 m, metal chromed, with special fixation on both sides.	■
Suction hoses complete									
Suction hose complete B1 M L=8m	7	4.440-013.0	1 piece(s)	ID 40	8 m			Eight metres long, electroconductive suction hose, NW 35. Screw connections cannot be confused.	□
Suction hoses complete (Clip-system)									
Suction hose electrically conducting C40	8	6.907-363.0	1 piece(s)	ID 40	4 m			Electroconductive suction hose, NW 35. Length: 4 metres.	■
All-purpose brushes									
All-purpose brush, DN 40, B1	9	4.763-242.0	1 piece(s)	ID 40	120 mm			All-purpose brush with natural bristles (cow hair) Bristles: 120 x 45 mm. Only for NT 801 B1 M, B1 MS and NT 80/1 B1 M & B1 MS.	□

■ Included in delivery. □ Available accessories.