
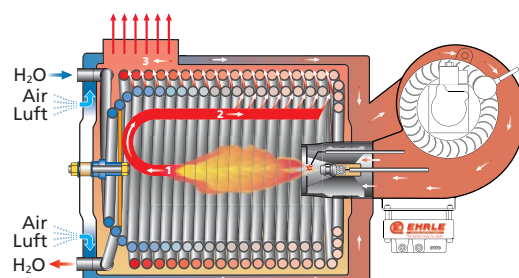


High Pressure Cleaner

Hot water, mobile - Series Etronic I

HD623 UK

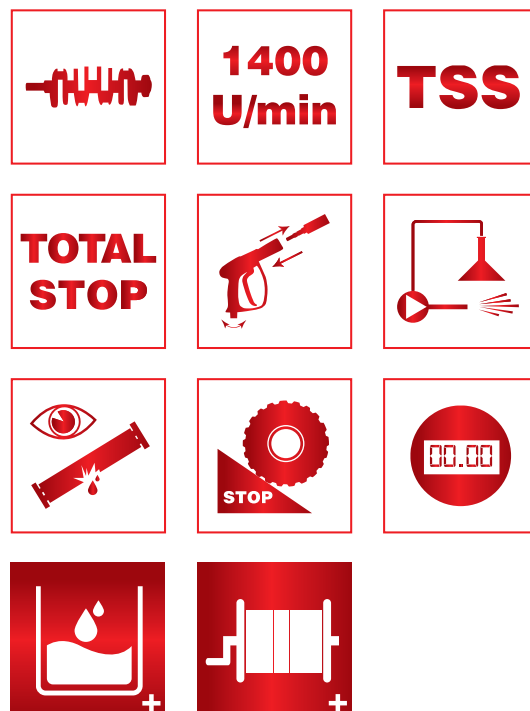

Type		HD623 UK-Standard	HD623 UK-Premium
Voltage	1/ 240V / 50Hz	<ul style="list-style-type: none"> Etronic I - Controls 	<ul style="list-style-type: none"> Etronic I - Controls
Operating pressure	30-135bar/ 3-13,5MPa	<ul style="list-style-type: none"> 10m HP-Hose DN08 - 315bar 	<ul style="list-style-type: none"> Hose-Reel
Max. pressure	150bar/ 15MPa	<ul style="list-style-type: none"> Trigger-Gun with swivel 	<ul style="list-style-type: none"> 20m HP-Hose DN08 - 315bar
Discharge capacity	300 - 600l/h	<ul style="list-style-type: none"> Spray-Lance 900mm c/w Nozzle- Protection 	<ul style="list-style-type: none"> Trigger-Gun with swivel
Nozzle size	040	<ul style="list-style-type: none"> Stainless-Steel Jet-Nozzle 25° 	<ul style="list-style-type: none"> Spray-Lance 900mm c/w Nozzle- Protection
Hot water capacity	30 - 98°C	<ul style="list-style-type: none"> Water-Supply separation acc. water reg. 	<ul style="list-style-type: none"> Stainless-Steel Jet-Nozzle 25°
Pump speed	1400rpm	<ul style="list-style-type: none"> Chemical supply in high-pressure Jet c/w Metering-valve 	<ul style="list-style-type: none"> Spray-Lance 900mm c/w Rotary-Nozzle
Connected load	3,1kW / 12,3A		<ul style="list-style-type: none"> Water-Supply separation acc. water reg.
Electrical protection	13A slow-blowing		<ul style="list-style-type: none"> Chemical supply in high-pressure Jet c/w Metering-valve
Weight net / with package		149 kg / 170 kg	158 kg / 179 kg
Dimensions device / with package (LxWxH)		1070 x 735 x 1020 mm / 1160 x 770 x 960 mm	1070 x 735 x 1310 mm / 1160 x 770 x 1350 mm
<p>Robust, corrosion-resistant, self-supporting device chassis, impact-resistant device-cover made of ABS, triplex-piston pump with brass pump head, nickel plated, high-performance ceramic piston, stainless-steel valves, leakage-return, Etronic I - controls: (Start-stop system with switch-off delay, total-switch-off after 20min) 2 motors system (independent of the direction of rotation) separately for H.P.-Pump and heating, unloader safety-valve c/w infinitely variable pressure and quantity regulation, 4 large rubber wheels for rough terrain, with a patented wheel brake 2-way, storage possibility for all accessories, integrated diesel-tank 25l, integrated detergent-tank 20l, robust rotary on-off switch, 7,5m connection cable, removable ergonomic drawbar</p>			
Art. No.		497000	497003
Retail price plus VAT		3,383.10 £	3,821.90 £