


High Pressure Cleaner

Hot water, mobile - Series HDE

HDE840 18 kW

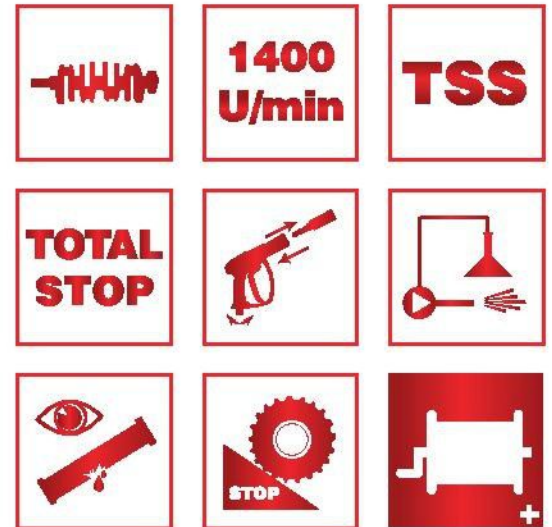

| Type | | HDE840 18kW-Standard | HDE840 18kW-Premium |
|--|--------------------|---|---|
| Voltage | 3/ 400-415V/ 50Hz | ▶ Etronic II - Controls | ▶ Etronic II - Controls |
| Operating pressure | 30-130bar/ 3-13MPa | ▶ 10m HP-Hose DN08 - 315bar | ▶ Hose-Reel |
| Max. pressure | 150bar/ 15MPa | ▶ Trigger-Gun with swivel | ▶ 20m HP-Hose DN08 - 315bar |
| Discharge capacity | 300 - 720l/h | ▶ Spray-Lance 900mm c/w Nozzle- Protection | ▶ Trigger-Gun with swivel |
| Nozzle size | 045 | ▶ Stainless-Steel Jet-Nozzle 25° | ▶ Spray-Lance 900mm c/w Nozzle- Protection |
| Heating capacity | 18kW | ▶ Water-Supply separation acc. water reg. | ▶ Stainless-Steel Jet-Nozzle 25° |
| Hot water capacity | 30 - 80°C | ▶ Chemical supply in high-pressure Jet c/w Metering-valve | ▶ Spray-Lance 900mm c/w Rotary-Nozzle |
| Pump speed | 1400rpm | | ▶ Water-Supply separation acc. water reg. |
| Connected load | 22,8kW / 35,2A | | ▶ Chemical supply in high-pressure Jet c/w Metering-valve |
| Electrical protection | 3x50A slow-blowing | | |
| Weight net / with package | | 121 kg / 142 kg | 130 kg / 151 kg |
| Dimensions device / with package (LxWxH) | | 1070 x 735 x 785 mm / 1160 x 770 x 960 mm | 1070 x 735 x 1310 mm / 1160 x 770 x 1350 mm |

Robust, corrosion-resistant, self-supporting device chassis, impact-resistant device-cover made of ABS, stainless-steel hotwater-boiler with 65l capacity with pre-heating and buffer storage for immediate hot-water use and hot-water preparation during stand-by operation, triplex-piston pump with chrome nickel pump head (hot-water resistant), high-performance ceramic piston, stainless-steel valves, leakage-return, Etronic II - controls: (start-stop system with switch-off delay, stand-by system for heating, low-water cut-off), unloader safety-valve c/w Infinitely variable pressure and quantity regulation, 4 large rubber wheels for rough terrain, with a patented wheel brake 2-way, storage possibility for all accessories, 2 integrated detergent-tank with 20l capacity, 2-stage rotary on-off switch with stand-by function, 7,5m connection cable, removable ergonomic drawbar