


# High Pressure Cleaner

Hot water, stationary, oil heated - Series HSC

HSC823 UK

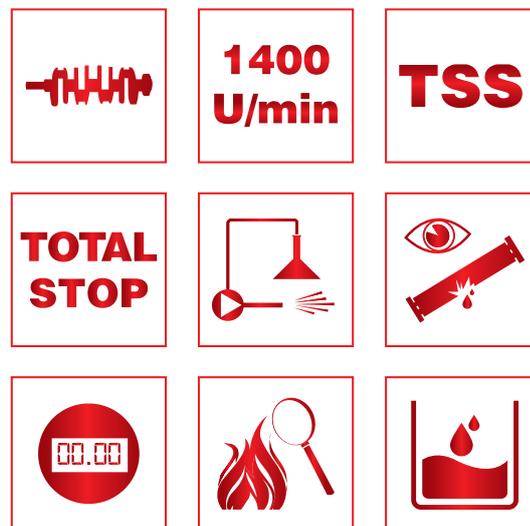

Type		HSC823 UK	HSC823 UK-INOX
Voltage	1/ 240V / 50Hz	<ul style="list-style-type: none"> <li>▶ Etronic II - Controls</li> <li>▶ 10m HP-Hose DN08 - 315bar</li> <li>▶ Trigger-Gun with swivel</li> <li>▶ Spray-Lance 900mm c/w Nozzle- Protection</li> <li>▶ Stainless-Steel Jet-Nozzle 25°</li> <li>▶ Water-Supply separation acc. water reg.</li> <li>▶ Chemical supply in high-pressure Jet c/w Metering-valve</li> </ul>	<ul style="list-style-type: none"> <li>▶ Stainless steel (food safe)</li> <li>▶ Etronic II - Controls</li> <li>▶ 10m HP-Hose DN08 - 315bar blue</li> <li>▶ Trigger-Gun with swivel</li> <li>▶ Spray-Lance 900mm c/w Nozzle- Protection</li> <li>▶ Stainless-Steel Jet-Nozzle 25°</li> <li>▶ Water-Supply separation acc. water reg.</li> <li>▶ Chemical supply in high-pressure Jet c/w Metering-valve</li> </ul>
Operating pressure	30-125bar/ 3-12,5MPa		
Max. pressure	140bar/ 14MPa		
Discharge capacity	300 - 720l/h		
Nozzle size	050		
Hot water capacity	30 - 98°C		
Pump speed	1400rpm		
Connected load	3,3kW / 13A		
Electrical protection	13A slow-blowing		
Weight net / with package		301 kg / 318 kg	300 kg / 317 kg
Dimensions device / with package (LxWxH)		1220 x 755 x 1625 mm/ 1250 x 815 x 1755 mm	1220 x 755 x 1625 mm/ 1250 x 815 x 1755 mm
<p>Self-supporting, robust, device-chassis made from galvanized steel and powder-coated (option INOX: device-chassis made out of stainless-steel), suitable for floor installation, triplex-piston pump with brass pump head, nickel plated, high-performance ceramic piston, stainless-steel valves, leakage-return, Etronic II - controls: (Start-stop system with switch-off delay, total-switch-off after 20min, OPH-counter with service information, optical flame monitoring with photoelectric cell and fault indicator-light) 2 motors system (independent of the direction of rotation) separately for H.P.-Pump and heating, unloader safety-valve c/w Infinitely variable pressure and quantity regulation, integrated diesel-tank 60l, separate space for 2 x 20l cleaning detergent-container c/w Remote activation, 2 different operating control level, 3 robust on-off rotary switches for H.P. Pump, heating and detergent, 7,5m connection cable</p>			
Art. No.		52602	525
Retail price plus VAT		5,757.80 £	6,939.00 £