


High Pressure Cleaner

KD940-F – Food appliance

with stainless steel pump, hot water resistant

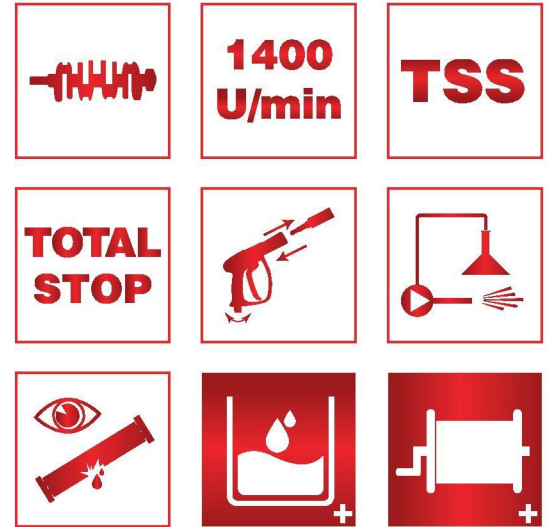

Type		KD940-F-Standard	KD940-F-Premium
Voltage	3/400-415V / 50Hz	▶ 10m HP-Hose DN08 - 315bar blue	▶ Hose-Reel
Operating pressure	30-130bar / 3-13MPa	▶ Trigger-Gun with swivel	▶ 15m HP-Hose DN08 - 315bar blue
Max. pressure	150bar / 15MPa	▶ Double Spray-Lance 900 mm c/w nozzle protection	▶ Trigger-Gun with swivel
Discharge capacity	300 - 840l/h	▶ Stainless-Steel Jet-Nozzle 25°	▶ Double Spray-Lance 900 mm c/w nozzle protection
Nozzle size	055	▶ 15l Cleaning-Detergent tank	▶ High and low pressure jet nozzle 25°
Max. Inlet temperature	80°C	▶ Detergent-Supply c/w Low-Pressure Injector and metering-valve	▶ Soft Foam Kit with 2 l foam detergent tank
Pump speed	1400rpm		▶ 17l Water-Storage tank
Connected load	3,5kW / 8,1A		▶ Water-Supply separation acc. water reg. Chemical supply in high-pressure Jet c/w Metering-valve
Electrical protection	3x16A slow-blowing		
Weight net / with package		54 kg / 74 kg	58 kg / 78 kg
Dimensions device / with package (LxWxH)		805 x 485 x 950 mm / 790 x 595 x 810 mm	830 x 485 x 950 mm / 790 x 595 x 810 mm

Food appliance with abrasion resistant high pressure hose blue, self-supporting, robust, corrossions free, rotation-moulded device-chassis for food industry, stainless steel, impact-resistant device-cover made of ABS, triplex-piston pump with chrome, nickel plated pump head (hot water resistant), high-performance ceramic piston, stainless-steel valves, leakage-return, start-stop system with switch-off delay, total-switch-off after 20min, unloader safety-valve c/w Infinitely variable pressure and quantity regulation, 2 large rubber wheels for rough terrain with rubber stand, storage possibility for all accessories, robust rotary on-off switch, 5,0m connection cable, removable ergonomic drawbar stainless steel