


High Pressure Cleaner

Hot water, stationary, electric heated - Series HSC

HSC840-INOX 24kW

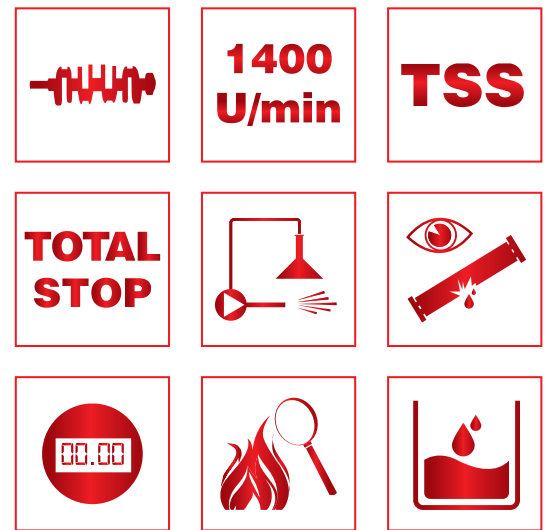

Type		HSC840-INOX 24kW
Voltage	3/400-415V/ 50Hz	<ul style="list-style-type: none"> ▶ Stainless steel (food safe) ▶ Etronic II - Controls ▶ 10m HP-Hose DN08 - 315bar blue ▶ Trigger-Gun with swivel ▶ Spray-Lance 900mm c/w Nozzle Protection ▶ Stainless-Steel Jet-Nozzle 25° ▶ Water-Supply separation acc. water reg. ▶ Chemical supply in high-pressure Jet c/w Metering-valve
Operating pressure	30-130bar/ 3-13MPa	
Max. pressure	150bar/ 15MPa	
Discharge capacity	300 - 720l/h	
Nozzle size	045	
Heating capacity	24kW	
Hot water capacity	30 - 80°C	
Pump speed	1400rpm	
Connected load	28,8kW / 44,2A	
Electrical protection	3x50A slow-blowing	
Weight net / with package	264 kg / 281 kg	
Dimensions device / with package (LxWxH)	1220 x 755 x 1625 mm / 1250 x 815 x 1755 mm	
<p>Self-supporting, robust, device-chassis made out of stainless-steel, suitable for floor installation, stainless-steel hotwater-boiler with 65l capacity with pre-heating and buffer storage for immediate hot-water use and hot-water preparation during stand-by operation.,triplex-piston pump with chrome nickel pump head (hot-water resistant), high-performance ceramic piston, stainless-steel valves, leakage-return, Etronic II - controls: (start-stop system with switch-off delay, stand-by system for heating, OPH-counter with service information, low-water cut-off), unloader safety-valve c/w Infinitely variable pressure and quantity regulation, seperate space for 2 x 20l cleaning detergent-container c/w remote activation, 2 different operating control level, 3 robust on-off rotary switches for H.P. pump, heating and detergent, 7,5m connection cable</p>		
Art. No.	531	
Retail price plus VAT	11,021.40 £	